

294-61.2

AU 7

48709

DL 0249688

SEP 1987

**POLL ★ Q38 88-036846/06 ★ DD-249-688-A**  
**Load supporting equipment for factory crane - is hollow beam with**  
**central crane hook connector between load carrying cross members**  
**VEB POLYGRAPH LEIPZIG 05.06.86-DD-290973**

(16.09.87) B66c-01/16


05.06.86 as 290973 (349RW)

A hollow beam has a central connection for the lifting hook of the crane. At each end is a forked support secured by a bolt passing through a hole in the beam. Both sides of the support projects a cross member, connected so that a minimum height is required. This has a connector at each end.

**USE** - Load handling device of minimum height enabling a crane installed in a warehouse or factory to be used effectively.

(Dwg.No.1)

N88-027887

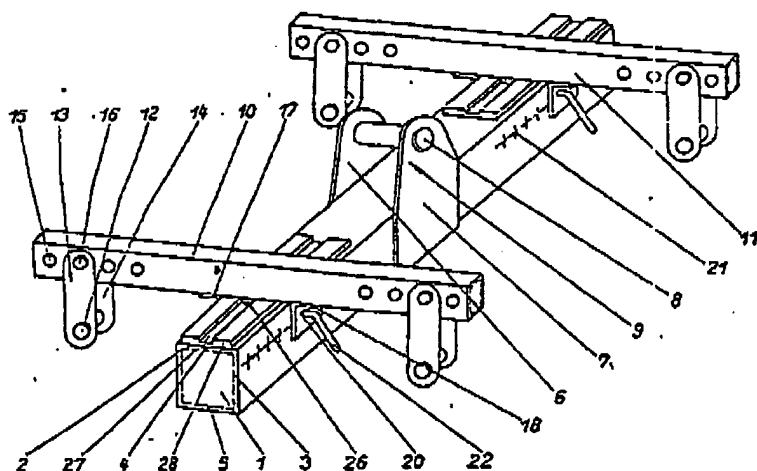

© 1988 DERWENT PUBLICATIONS LTD.  
 128, Theobalds Road, London WC1X 8RP, England  
 US Office: Derwent Inc.  
 Suite 500, 6845 Elm St. McLean, VA 22101  
 Unauthorised copying of this abstract not permitted.

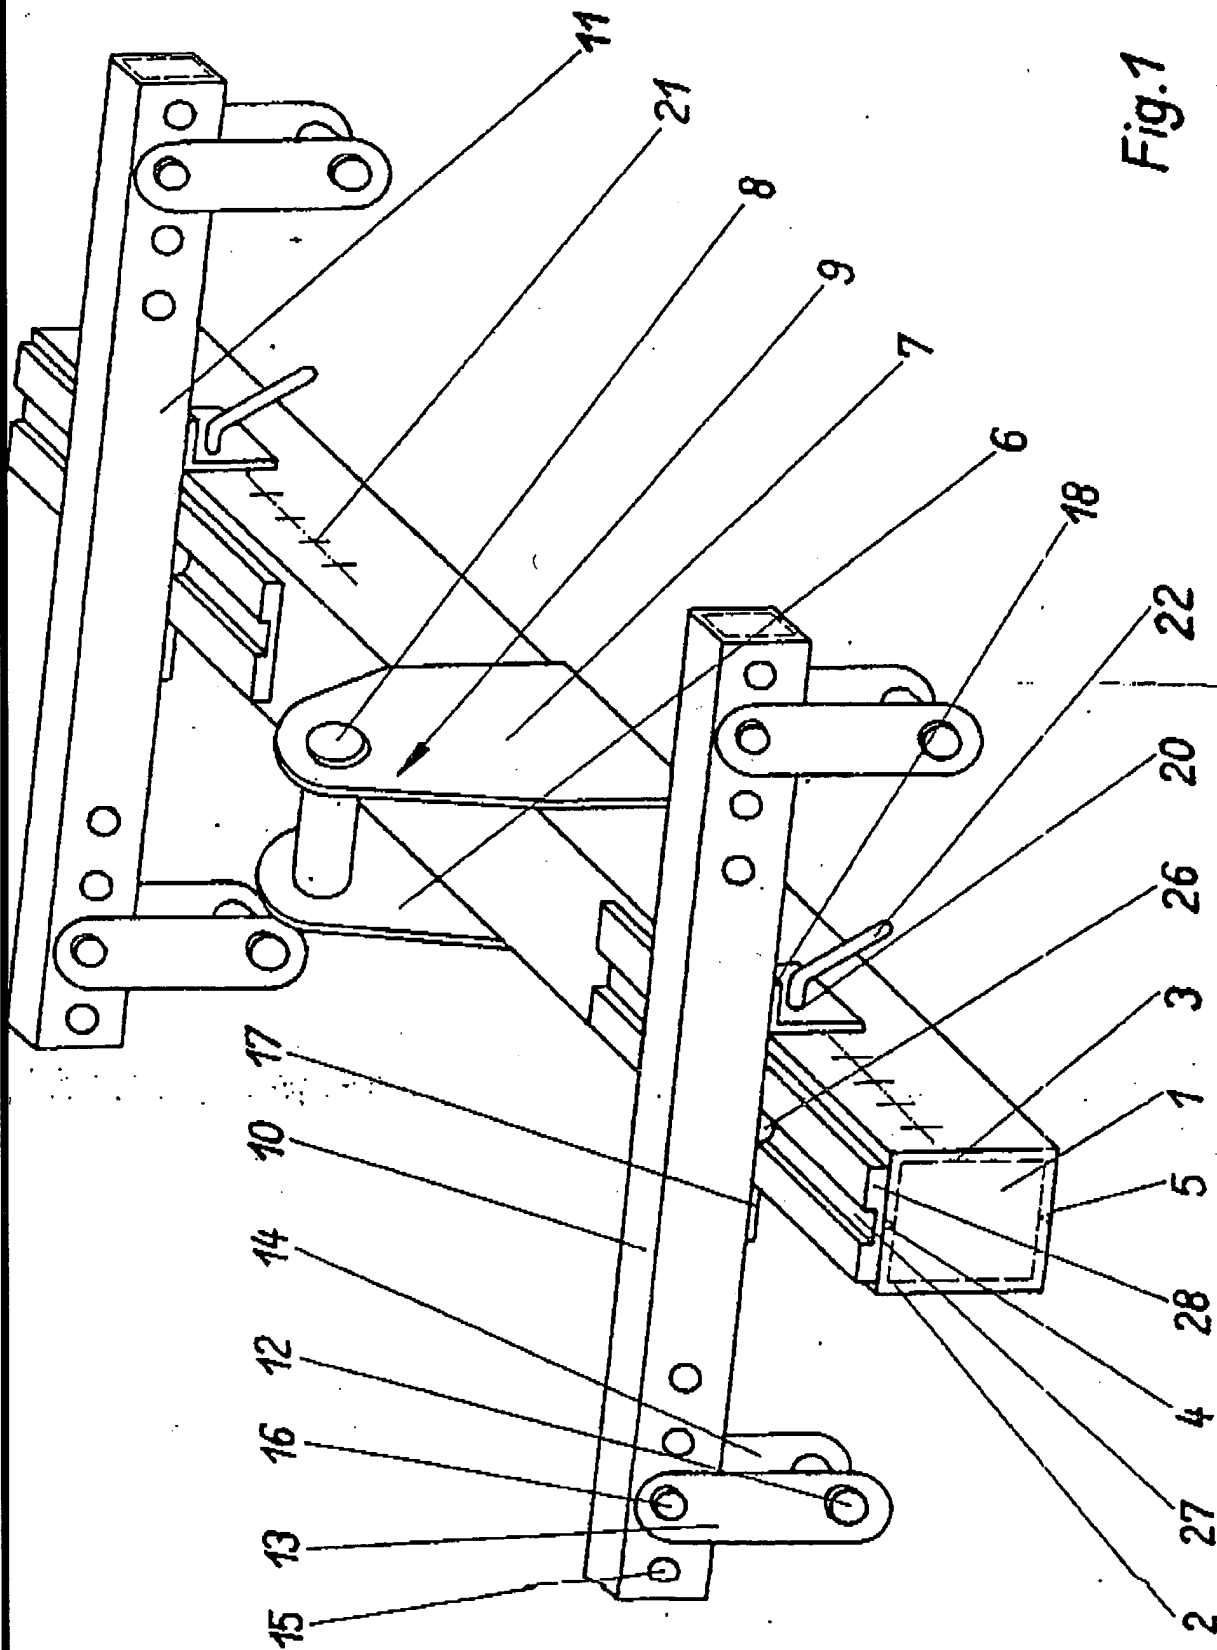


Fig.1

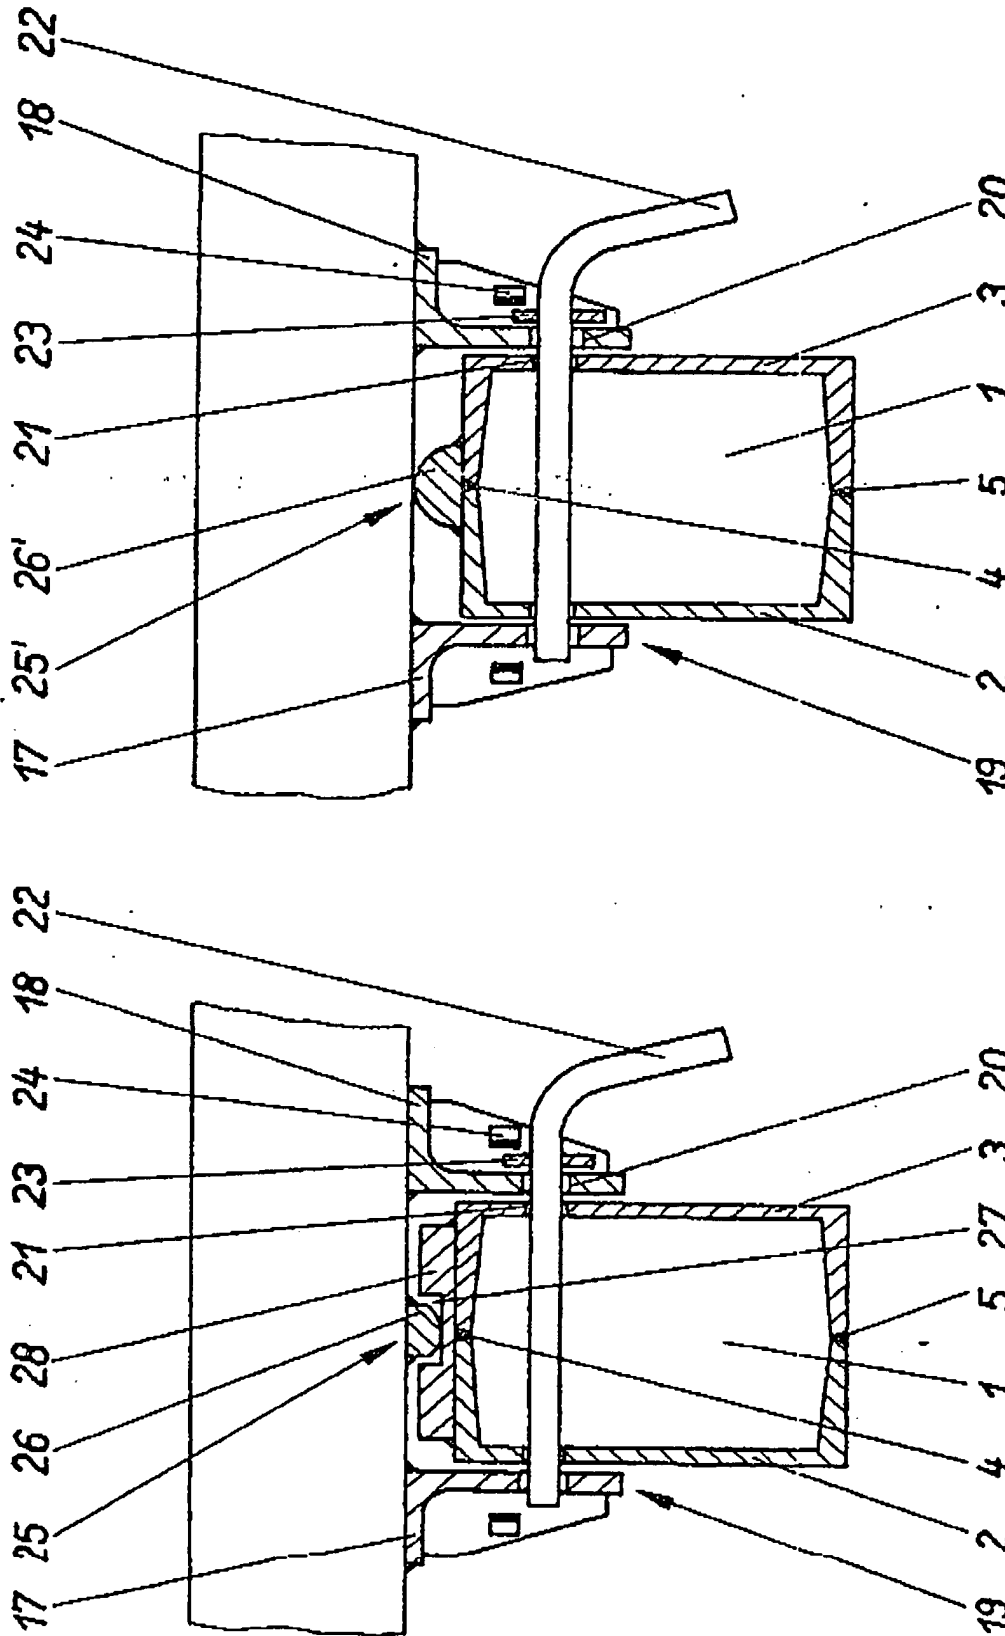


Fig.3

Fig.2

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**